

A clear and vivid color display, capable of portraying the finest detail. It's revolutionary design makes it the ideal solution for large events, exhibitions, broadcasting and concert tours.



Feature:



Certificates:




Feature:

Good uniformity and vivid images.

Fanless, silent, good heat-dissipation.

Various cabinet sizes could be designed.

Magnet front service and curved shape are available.

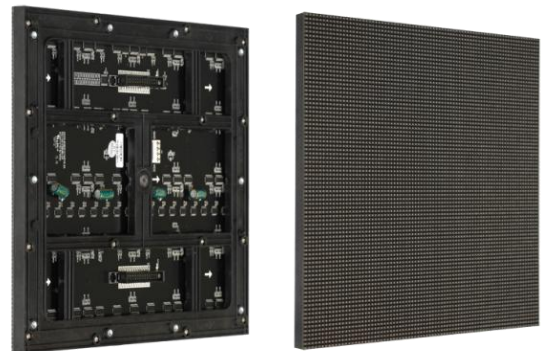

PRODUCT SPECIFICATION

Item	Fixed		
	ID-3S	ID-4S	ID-5S
Model	ID-3S	ID-4S	ID-5S
Pixel Pitch (mm)	3	4	5
Pixel Density (dot/m ²)	111,111	62,500	40,000
LED Type	SMD2121	SMD2121	SMD3528
Module Size (W x H x D)mm	240 x 240 x 15	240 x 240 x 15	240 x 240 x 15
Module Resolution (W x H)	80 x 80	60 x 60	48 x 48
Module Weight (Kg)	0.52	0.52	0.51
Power Consumption per Module (W)	25	25	25
Driver Mode (Scan)	1/16	1/15	1/12
Brightness (cd/m ²)	≥800	≥800	≥1,200
Grey Scale (bits)	14	14	14
Refresh Rate (Hz)	≥960	≥960	≥960
Cabinet Size (W x H x D)mm	480 x 480 x 135	480 x 480 x 135	480 x 480 x 135
Cabinet Resolution (W x H)	160 x 160	120 x 120	96 x 96
Cabinet Weight (Kg/m ²)	45	45	45
Max Power Consumption (W/m ²)	≤450	≤750	≤550
Average Power consumption (W/m ²)	202	338	250
Viewing Angle	Degree: H	120°	
	Degree: V	120°	
Mini View Distance (m)	3	4	5
Use Temperature(°C)	Operating	-10°C~40°C/14°F~104°F	
	Storage	-20°C~50°C/-4°F~122 °F	
Input Voltage	100~240V		
Input Power Frequency (Hz)	50Hz-60Hz		
Failure Rate	<1/100,000		
Signal Input Format	SDI, RGBHV, YUV,YC, Composite, HDMI,DVI, SD/HD-SDI etc.		
Life Time (hrs)	100,000		
IP Level (Front / Rear)	IP43 / IP30		

Remark: Specifications are subject to change without notice.

