

Indoor media advertising, Indoor live event / show broadcast

Indoor highest Definition Revolution, super hi-vision. It's revolutionary design makes it the ideal solution for large events, exhibitions, broadcasting and concert tours.

Indoor Die-Casting – IDC Series



Feature:



Certificates:




Feature: >>>

Light weight and ultrathin body.

Tool-free assembly and disassembly.

Seamless installation, error < 0.1mm.

Good heat dissipation, without flat cable design.

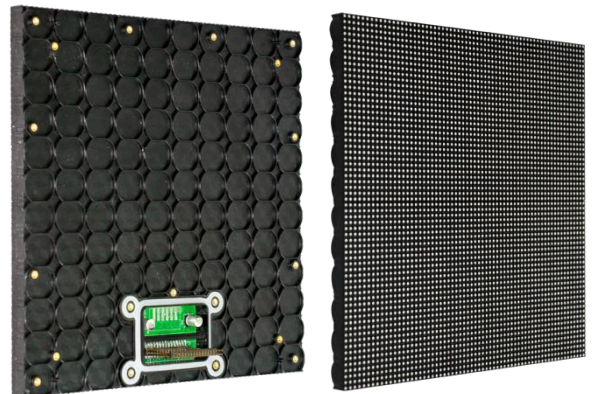

PRODUCT SPECIFICATION

Item	Rental & Events						
	IDC-2.5S	IDC-3S	IDC-3.91S	IDC-4S	IDC-4.81S	IDC-5S	IDC-6S
Model	IDC-2.5S	IDC-3S	IDC-3.91S	IDC-4S	IDC-4.81S	IDC-5S	IDC-6S
Pixel Pitch (mm)	2.5	3	3.91	4	4.81	5	6
Pixel Density (dot/m ²)	160000	111111	65410	62500	43264	40000	27777
LED Type	SMD2121	SMD2121	SMD2121	SMD2121	SMD3528	SMD3528	SMD3528
Module Size (W x H x D)mm	160 x 160 x 15	192 x 96 x 15	250 x 250 x 15	256x128 x 15	250 x 250 x 15	320x160x 15	192 x 192 x 15
Module Resolution (W x H)	64 x 64	64x 32	64 x 64	64x32	52 x 52	64x32	32x32
Module Weight (Kg)	0.61	0.61	0.61	0.60	0.60	0.60	0.7
Power Consumption per Module (W)	40	40	40	40	40	40	40
Driver Mode (Scan)	1/32	1/32	1/13	1/16	1/13	1/16	1/8
Brightness (cd/m ²)	≥1,000	≥1,000	≥1,000	≥1,000	≥1,000	≥1,000	≥1,200
Grey Scale (bit)	16	16	16	16	16	16	16
Refresh Rate (Hz)	≥1,920	≥1,920	≥1,920	≥1,920	≥1,920	≥1,920	≥1,920
Cabinet Size (W x H x D)mm	480 x 480 x 92	576 x 576x 92	500 x 500 x 92	512x512 x 92	500 x 500 x 92	640 x 640 x 92	576 x 576 x 92
Cabinet Resolution (W x H)	192 x 192	192 x 192	128 x 128	128x128	104 x 104	128 x 128	96x96
Cabinet Weight (Kg/cabinet)	8.2	8.2	8.2	8.2	8.2	8.2	8.2
Max Power Consumption (W/m ²)	≤1000	≤800	≤600	≤800	≤800	≤600	≤600
Average Power consumption (W/m ²)	330	240	240	240	240	200	200
Viewing Angle	Degree: H			160°			
	Degree: V			160°			
Mini View Distance (m)	2.5	3	3.90	4	4.81	5	6
Use Temperature(°C)	Operating		-10°C~40°C/14°F~104°F				
	Storage		-20°C~50°C/-4°F~122 °F				
Input Voltage	100~240V						
Input Power Frequency (Hz)	50Hz-60Hz						
Failure Rate	<1/100,000						
Signal Input Format	SDI, RGBHV, YUV,YC, Composite, HDMI,DVI, SD/HD-SDI etc.						
Life Time (hrs)	100,000						

Remark: Specifications are subject to change without notice.



#7, Street 1, Liao Keng Area, Shiyao Town, Bao'an District, Shenzhen City, China



Web:www.jleddisplay.com



E-mail: sales@jleddisplay.com



International hotline:

86-150 1405 1044