

Outdoor media advertising, outdoor live event / show broadcast


Outdoor highest Definition Revolution, super hi-vision. It's revolutionary design makes it the ideal solution for large events, exhibitions, broadcasting and concert tours.



Feature:



Certificates:

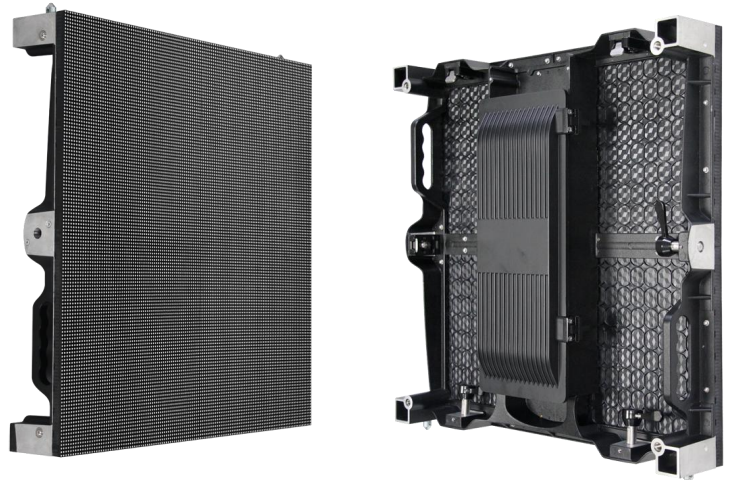


Feature: >>>

Light weight and ultrathin body.

Tool-free assembly and disassembly.

Seamless installation, error < 0.1mm.

Good heat dissipation, without flat cable design.

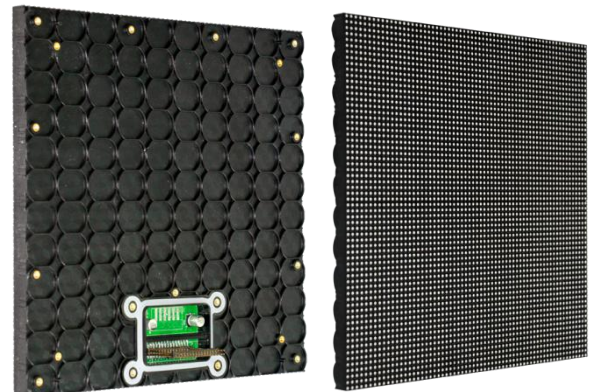

PRODUCT SPECIFICATION

Item	Rental & Events		
	OHD-3.91S	OHD-4.81S	OHD-5.95S
Model	OHD-3.91S	OHD-4.81S	OHD-5.95S
Pixel Pitch (mm)	3.91	4.81	5.95
Pixel Density (dot/m ²)	65,536	43,264	28,224
LED Type	SMD2525	SMD2525	SMD2525
Module Size (W x H x D)mm	250 x 250 x 15	250 x 250 x 15	250 x 250 x 15
Module Resolution (W x H)	64 x 64	52 x 52	42 x 42
Module Weight (Kg)	0.72	0.69	0.65
Power Consumption per Module (W)	40	40	41
Driver Mode (Scan)	1/16	1/13	1/7
Brightness (cd/m ²)	≥5,500	≥5,500	≥5,500
Grey Scale (bit)	14	14	14
Refresh Rate (Hz)	≥1,920	≥1,920	≥1,920
Cabinet Size (W x H x D)mm	500 x 500 x 92	500 x 500 x 92	500 x 500 x 92
Cabinet Resolution (W x H)	128 x 128	104 x 104	84 x 84
Cabinet Weight (Kg/cabinet)	8.2	8.2	8.2
Max Power Consumption (W/m ²)	≤770	≤770	≤800
Average Power consumption (W/m ²)	350	350	360
Viewing Angle	Degree: H	120°	
	Degree: V	120°	
Mini View Distance (m)	4	5	6
Use Temperature(°C)	Operating	-10°C~40°C/14°F~104°F	
	Storage	-20°C~50°C/-4°F~122 °F	
Input Voltage	100~240V		
Input Power Frequency (Hz)	50Hz-60Hz		
Failure Rate	<1/100,000		
Signal Input Format	SDI, RGBHV, YUV,YC, Composite, HDMI,DVI, SD/HD-SDI etc.		
Life Time (hrs)	100,000		
IP Level (Front / Rear)	IP65 / IP65		

Remark: Specifications are subject to change without notice.

